

what the alternative mark means, and that this can be substantiated with documentation.

(iii) The EPA Regional Administrator in the appropriate region is informed in writing of the use of the alternative mark by October 3, 1988 and is provided with documentation that the program began before August 15, 1985, and documentation that demonstrates that prior to that date the primary fire department knew, accepted and recognized the meaning of the mark, and included this information in firefighting training.

(iv) The Regional Administrator will either approve or disapprove in writing the use of an alternative mark within 30 days of receipt of the documentation of a program.

(3) Any mark placed in accordance with the requirements of this section must be placed in the locations described in paragraph (j)(1) of this section and in a manner that can be easily read by emergency response personnel fighting a fire involving this equipment.

(k) As of April 26, 1999 the following PCB Items shall be marked with the  $M_L$  mark as described in § 761.45(a):

(1) All PCB Large Low Voltage Capacitors not marked under paragraph (a) of this section shall be marked individually, or if one or more PCB Large Low Voltage Capacitors are installed in a protected location such as on a power pole, or structure, or behind a fence, then the owner or operator shall mark the pole, structure, or fence with the  $M_L$  mark, and maintain a record or procedure identifying the PCB Capacitors at the protected location. PCB Large Low Voltage Capacitors in inaccessible locations inside equipment need not be marked individually, provided the owner or operator marks the equipment in accordance with paragraph (k)(2) of this section, and marks the individual capacitors at the time of removal from use in accordance with paragraph (a) of this section.

(2) All equipment not marked under paragraph (a) of this section containing a PCB Transformer or a PCB Large High or Low Voltage Capacitor.

(1)(1) All voltage regulators which contain 1.36 kilograms (3 lbs.) or more of dielectric fluid with a PCB con-

centration of  $\geq 500$  ppm must be marked individually with the  $M_L$  mark as described in § 761.45(a).

(2) Locations of voltage regulators which contain 1.36 kilograms (3 lbs.) or more of dielectric fluid with a PCB concentration of  $\geq 500$  ppm shall be marked as follows: The vault door, machinery room door, fence, hallway, or means of access, other than grates or manhole covers, must be marked with the  $M_L$  mark as described in § 761.45(a).

[44 FR 31542, May 31, 1979. Redesignated at 47 FR 19527, May 6, 1982, and amended at 47 FR 37359, Aug. 25, 1982; 50 FR 29201, July 17, 1985; 50 FR 32176, Aug. 9, 1985; 53 FR 12524, Apr. 15, 1988; 53 FR 27329, July 19, 1988; 63 FR 35443, June 29, 1998; 64 FR 33760, June 24, 1999]

#### § 761.45 Marking formats.

The following formats shall be used for marking:

(a) *Large PCB Mark— $M_L$* . Mark  $M_L$  shall be as shown in Figure 1, letters and striping on a white or yellow background and shall be sufficiently durable to equal or exceed the life (including storage for disposal) of the PCB Article, PCB Equipment, or PCB Container. The size of the mark shall be at least 15.25 cm (6 inches) on each side. If the PCB Article or PCB Equipment is too small to accommodate this size, the mark may be reduced in size proportionately down to a minimum of 5 cm (2 inches) on each side.

(b) *Small PCB Mark— $M_s$* . Mark  $M_s$  shall be as shown in Figure 2, letters and striping on a white or yellow background, and shall be sufficiently durable to equal or exceed the life (including storage for disposal) of the PCB Article, PCB Equipment, or PCB Container. The mark shall be a rectangle 2.5 by 5 cm (1 inch by 2 inches). If the PCB Article or PCB Equipment is too small to accommodate this size, the mark may be reduced in size proportionately down to a minimum of 1 by 2 cm (.4 by .8 inches).

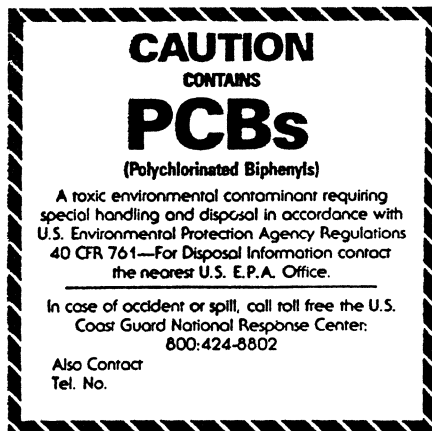


Figure 1

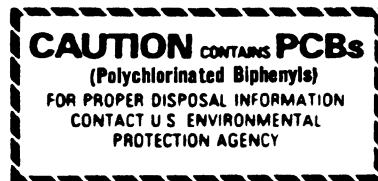


Figure 2

[44 FR 31542, May 31, 1979. Redesignated at 47 FR 19527, May 6, 1982]

### Subpart D—Storage and Disposal

#### § 761.50 Applicability.

(a) *General PCB disposal requirements.* Any person storing or disposing of PCB waste must do so in accordance with subpart D of this part. The following prohibitions and conditions apply to all PCB waste storage and disposal:

(1) No person may open burn PCBs. Combustion of PCBs approved under § 761.60 (a) or (e), or otherwise allowed under part 761, is not open burning.

(2) No person may process liquid PCBs into non-liquid forms to circumvent the high temperature incineration requirements of § 761.60(a).

(3) No person may discharge water containing PCBs to a treatment works (as defined § 503.9(aa) of this chapter) or to navigable waters unless the PCB concentration is <3 µg/L (approximately 3 ppb), or unless the discharge is in accordance with a PCB discharge limit included in a permit issued under

section 307(b) or 402 of the Clean Water Act.

(4) Spills and other uncontrolled discharges of PCBs at concentrations of ≥50 ppm constitute the disposal of PCBs.

(5) Any person land disposing of non-liquid PCBs may avoid otherwise-applicable sampling requirements by presuming that the PCBs disposed of are ≥500 ppm (or ≥100 µg/100 cm<sup>2</sup> if no free-flowing liquids are present).

(6) Any person storing or disposing of PCBs is also responsible for determining and complying with all other applicable Federal, State, and local laws and regulations.

(b) *PCB waste*—(1) *PCB liquids.* Any person removing PCB liquids from use (i.e., not PCB remediation waste) must dispose of them in accordance with § 761.60(a), or decontaminate them in accordance with § 761.79.

(2) *PCB Items.* Any person removing from use a PCB Item containing an intact and non-leaking PCB Article must dispose of it in accordance with § 761.60(b), or decontaminate it in accordance with § 761.79. PCB Items where the PCB Articles are no longer intact and non-leaking are regulated for disposal as PCB bulk product waste under § 761.62(a) or (c).

(i) Fluorescent light ballasts containing PCBs only in an intact and non-leaking PCB Small Capacitor are regulated for disposal under § 761.60(b)(2)(ii).

(ii) Fluorescent light ballasts containing PCBs in the potting material are regulated for disposal as PCB bulk product waste under § 761.62.

(3) *PCB remediation waste.* PCB remediation waste, including PCB sewage sludge, is regulated for cleanup and disposal in accordance with § 761.61.

(i) Any person responsible for PCB waste at as-found concentrations ≥50 ppm that was either placed in a land disposal facility, spilled, or otherwise released into the environment prior to April 18, 1978, regardless of the concentration of the spill or release; or placed in a land disposal facility, spilled, or otherwise released into the environment on or after April 18, 1978, but prior to July 2, 1979, where the concentration of the spill or release was