

§ 59.214

40 CFR Ch. I (7-1-03 Edition)

(1) ASTM Method E220-86 Standard Method for Calibration of Thermocouples by Comparisons Techniques, incorporation by reference (IBR) approved for § 59.208(m)(4).

(2) ASTM Method E380-82 Metric Practice, IBR approved for § 59.208(k).

(3) SCAQMD Method 25.1, March 1989 Determination of Total Gaseous Non-Methane Organic Emissions as Carbon (amended February 26, 1991) IBR approved for § 59.208(g)(2).

§ 59.214 Availability of information and confidentiality

(a) Availability of information. Specific reports or records required by this

subpart are not available to the public. The Administrator will, upon request, provide information as to the compliance status of a product or regulated entity.

(b) Confidentiality. All confidential business information entitled to protection under section 114(c) of the CAA that must be submitted or maintained by a regulated entity pursuant to this section shall be treated in accordance with 40 CFR part 2, Subpart B.

TABLE 1 TO SUBPART C—VOC CONTENT LIMITS BY PRODUCT CATEGORY

Product category	VOC content limit (weight-percent VOC)
Air fresheners:	
Single-phase .....	70
Double-phase .....	30
Liquids/pump sprays .....	18
Solids/gels .....	3
Automotive windshield washer fluid .....	35
Bathroom and tile cleaners:	
Aerosols .....	7
All other forms .....	5
Carburetor and choke cleaners .....	75
Cooking sprays—aerosol .....	18
Dusting aids:	
Aerosols .....	35
All other forms .....	7
Engine degreasers .....	75
Fabric protectants .....	75
Floor polishes/waxes:	
Products for flexible flooring materials .....	7
Products for nonresilient flooring .....	10
Wood floor wax .....	90
Furniture maintenance products-aerosol .....	25
General purpose cleaners .....	10
Glass cleaners:	
Aerosols .....	12
All other forms .....	8
Hairsprays .....	80
Hair mousses .....	16
Hair Styling gels .....	6
Household adhesives:	
Aerosols .....	75
Contact .....	80
Construction and panel .....	40
General purpose .....	10
Structural waterproof .....	15
Insecticides:	
Crawling bug .....	40
Flea and tick .....	25
Flying bug .....	35
Foggers .....	45
Lawn and Garden .....	20
Laundry prewash:	
Aerosols/solids .....	22
All other forms .....	5
Laundry starch products .....	5
Nail polish removers .....	85
Oven cleaners:	
Aerosols/pump .....	8
Liquids .....	5
Shaving creams .....	5

**Environmental Protection Agency**


**Pt. 59, Subpt. C, Table 2**

TABLE 2 TO SUBPART C.—HVOC<sup>1</sup> CONTENT LIMITS FOR UNDERARM DEODORANTS AND UNDERARM ANTIPERSPIRANTS

Product category	Percent HVOC content limit (weight-percent HVOC)
Underarm antiperspirants—aerosol .....	60
Underarm deodorants—aerosol .....	20

<sup>1</sup> High-volatility organic compound (HVOC) are VOC with vapor pressure greater than 80 millimeters of mercury at 20 degrees Celsius.

APPENDIX A TO SUBPART C OF PART 59—FIGURES

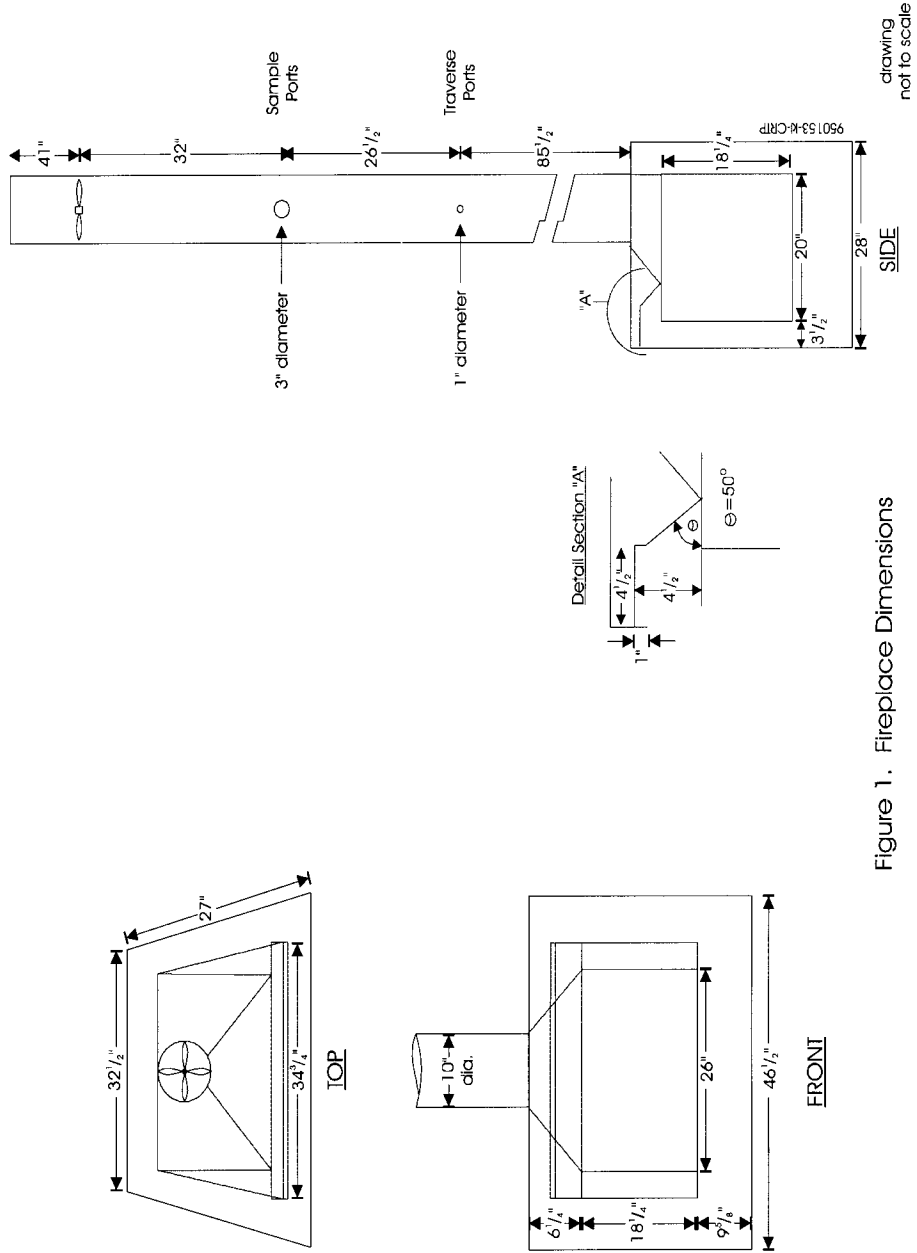

drawing  
not to scale

Figure 1. Fireplace Dimensions

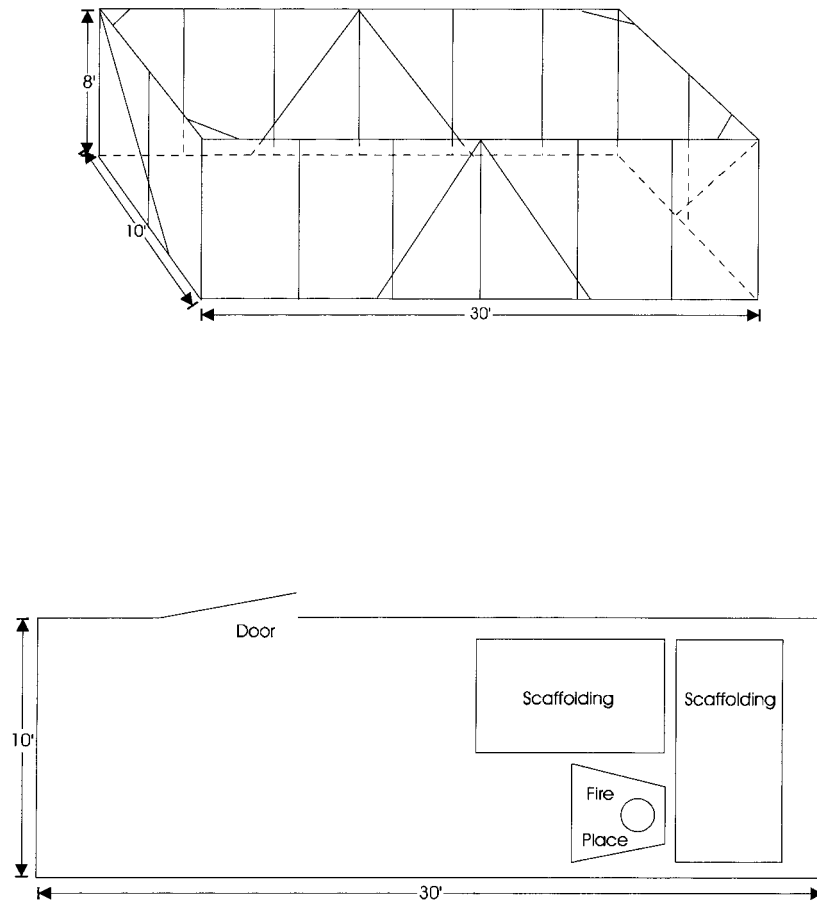


Figure 2. Suggested Enclosure Design

950154-4-CRIP


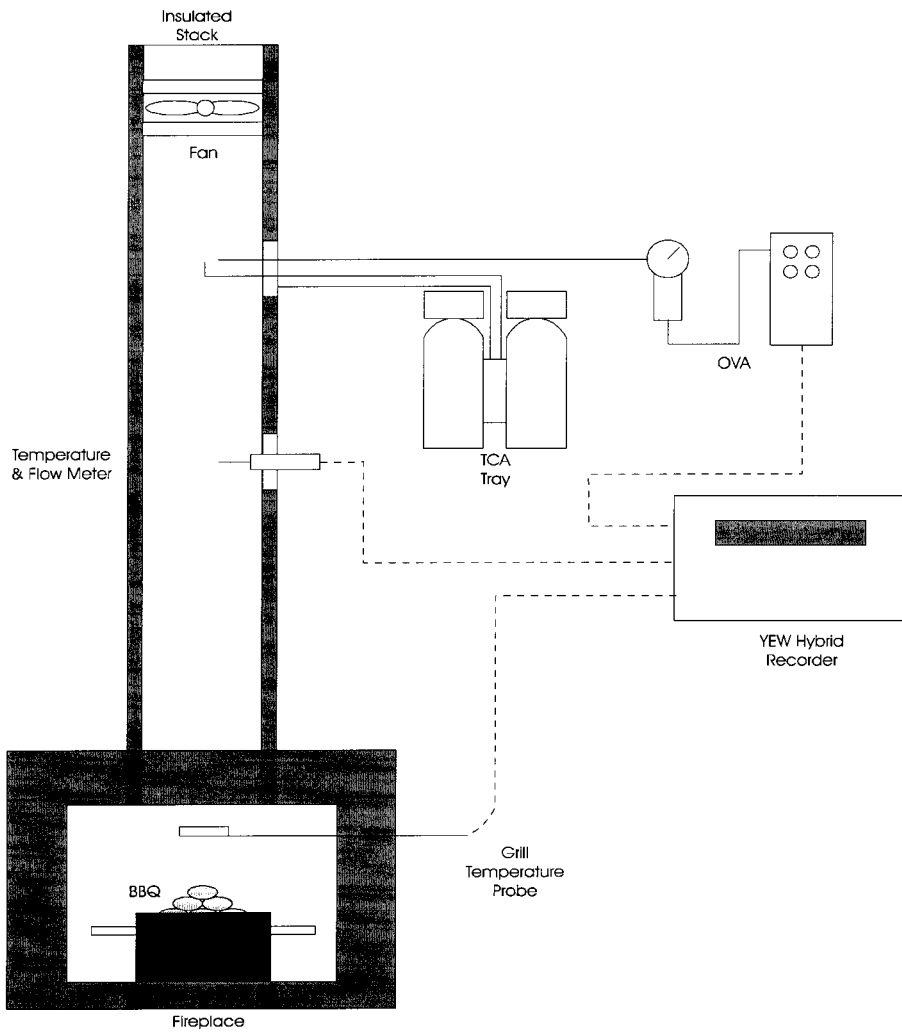


Figure 3. Sampling Apparatus Set-up with Chart Recorder

950156C-ja.RFP

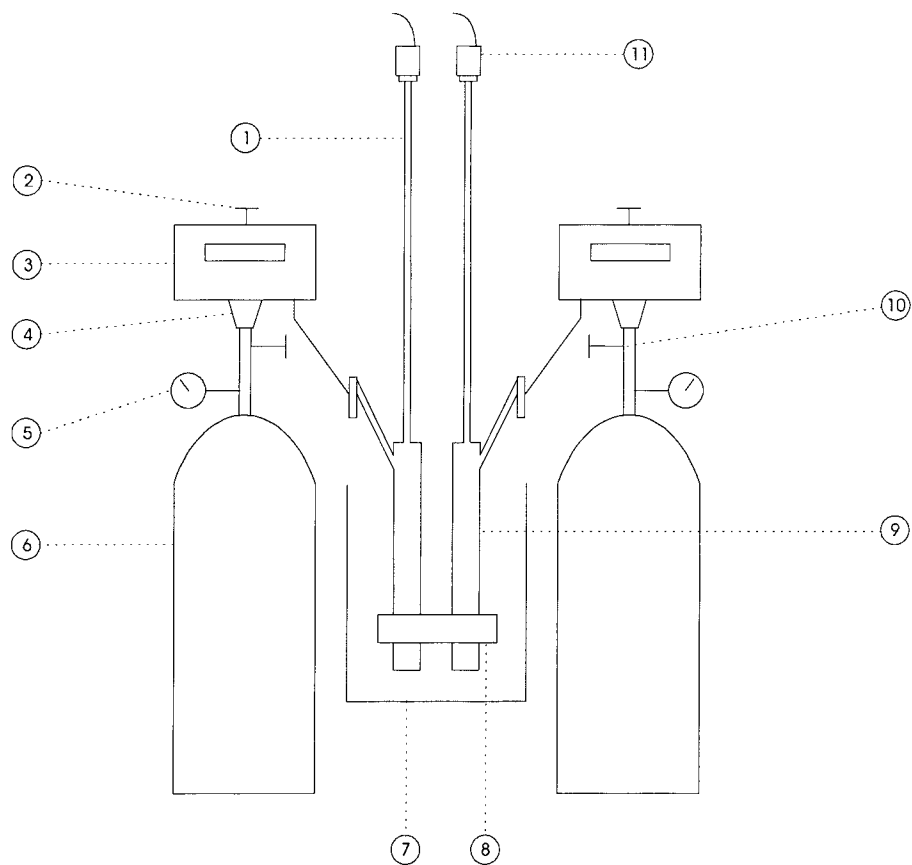

- |  |                                   |
|--|-----------------------------------|
| 1. Sampling Probe                        | 7. Condensate Trap Container      |
| 2. Flow Rate Control Valve               | 8. Heat Sink Trap                 |
| 3. Minihelic Differential Pressure Gauge | 9. Condensate Trap                |
| 4. Vacuum Regulator                      | 10. Sample Flow Valve             |
| 5. Vacuum Gauge                          | 11. Two Micron Particulate Filter |
| 6. Evacuated Tank                        |                                   |

Figure 4. Sampling Apparatus for Organics

9501.56C-1a-RTP